


Designed for covering your 2D profiles such as cornices, the CROMA coating machine ensure the best finish. Thanks to the automatic advance of the profiles and the speed adjustment, you can control the deposit's regularity whatever the coating type. With an output up to 300 linear meters per hour, it is the essential machine for mass production

## Advantages

- Automated system for large series
- Ensures a smooth, uniform surface and clean result
- Double guidance for greater productivity
- Comes with a catalog of 1,500 profiles ready to use
- CE compliant machine with instructions
- **2 years warranty**

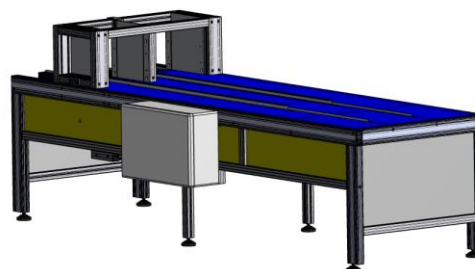

Technical Data		
	Electrical connection	230 VAC or 115 VAC single phase.
	Consumption	1KW / hour
	Maximum Overall dimensions (mm)	L= 3000 w= 1500 H= 1800
	Speed	Adjustable: up to 360m / hour
	Conditions of use	-10 ° to 40 ° C
	Coating consumption	4.5kg / m <sup>2</sup>
	Tank capacity	± 55 liters
	Precision	± 1 mm
	Minimum coating thickness	± 3 mm

Models	S	XL
<b>Profiles coating Capacities(Mm)</b>		
Minimum length	600	600
Maximum width	620	1200
Maximum height	620	620

For other dimensions, please [Contact Us](#)

## Available option

### Automatic feeding pump



Load the 300 liters hoper with your coating and set the output so the pump can continuously feed the machine for your large series